

EH-5140HB



※ Specification

EH-5140HB	
Usage & Open Type Options	IN / Outdoor & Side Hinge Type Heater (H), Blower (B) IR LED Lamp(IR)
Body & Color	Aluminum 6063 UV Protect Powder Coating & Cool Gray 1C
Power	Heater & Blower : 24V / 110V / 230V
Temperature of use	EH-5140 : -15°C~+50°C EH-5140HB : -40°C~+50°C (Heater, Blower)
Safety certification	CE
IP Level	IP 54
Dimension (Out side) mm	144(w) x 111(h) x 460(d)
Dimension (In side) mm	100(w) x 80(h) x 310(d)
Weight	1.5kg
Accessories	Spring Washa M6, Flat Washer M6, Screw 1/4"-20X3/8" 3ea

※ These specifications are standard and subject to change when designed


Features

- Indoor/outdoor housing of aluminium
- Day&Night (IR LED option)
- Smart heater/fan (optional)
- Indoor/outdoor housing with waterproof grade (IP 54)
- Option: Heater (H), Blower (B)


MODEL OPTIONAL

- 1.EH-5140H (Heater)
- 2.EH-5140HB (Heater, Blower)

SIDE OPEN VIEW

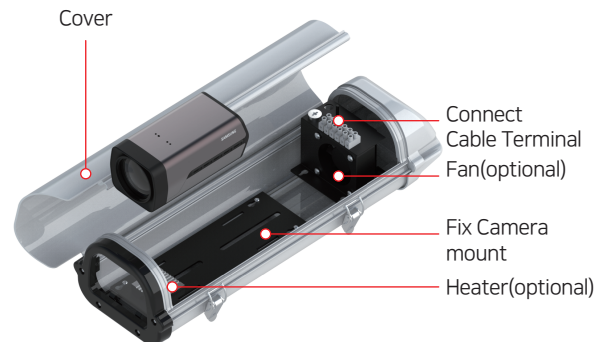


Dimensions

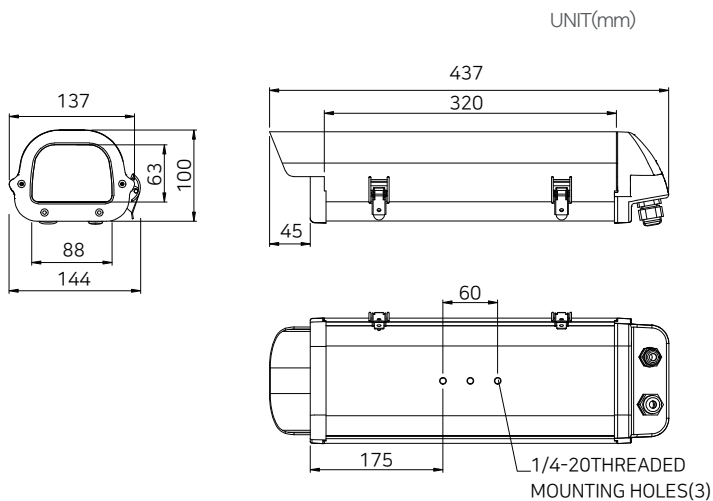

Accessories

| KBR-060CC | Wall Mount




Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x145.5x75

※ Compatible with PTB-100

| KBR-1000 | Wall Mount



Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ Compatible with KBR-2000 ~ KBR-5000