

Kevis CCTV & DVR RACK SERIES



RACK series

AB-66XX / AB-67XX / AB-68XX / AB-86XX / MINI RACK

- Front and rear door locks
- Cooling fan mounted on top for internal device heat dissipation
- Front 5mm tempered glass used
- Urethane wheels for easy movement and durability
- Left/right panel opening/closing function
- 19-inch, 22-inch monitor mountable

AB - 66XX SERIES

RACK AB-66XX

KEVIS RACK AB-66XX SERIES

CCTV RACK
SERIES



Product Features

- Front and rear door locks
- Cooling fans (2EA) mounted on top for internal device heat dissipation
- Front uses 5mm tempered glass
- Urethane wheels for easy movement and durability
- Left/right panel opening/closing function
- 19-inch, 22-inch monitors can be installed

Specifications

Division	6615	6622	6627	6632	6637	6642	6647
Unit	15	22	27	32	37	42	47
Height (H)	790	1,200	1,400	1,600	1,800	2,000	2,200
Width (W)	600	600	600	600	600	600	600
Depth (D)	600	600	600	600	600	600	600
Color	5Y7-1						

※ Please refer to the color Munsell.


※ Unit quantity depends on the request of the customer. Unit Height varies according to quantity.

RACK Basic knowledge

Unit : mm

1. RACK

: Steel box for efficient storage of servers/network equipment/monitors/DVRs, NVRs

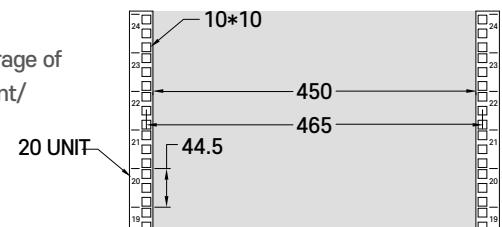

2. Standard RACK Size

- Standard RACK width (W): 19" (standard specification)
- RACK height (H): Usually 1.75 inches (4.4cm = 44.5mm) is called **1 UNIT**(1U or 1RU)
- UNIT (RU OR U): Height when installing servers and hubs. (Usually 24 or 42 fit)
- RACK specifications: Width (W) x Depth (D) x Height (H).


ex) 6U represents the height (H) of the storage device, which is $6 \times 4.4\text{cm} = 26.4\text{cm}$.

STANDARD

Unit : mm


Distinction (Inch)	Standard			Kevis Standard		
	W	D	H	W	D	H
19"	600	900	2100	600	600	2100
23"	750	900	2100	800	900	2100

Appearance

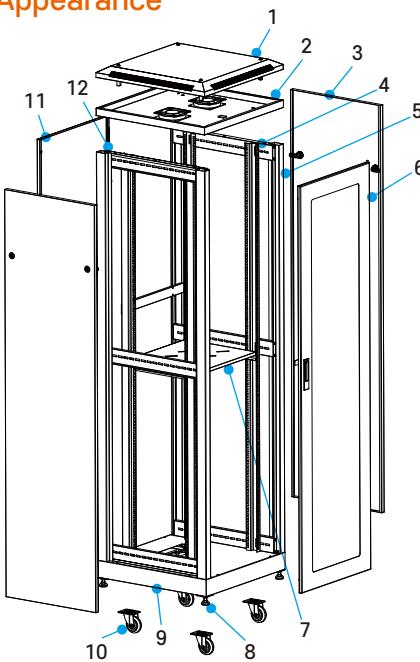

| Main Stucture

- Top cover
- Fan tray
- Side panel
- Rail
- Frame
- Front door
- Fixed shelf
- M12 adjustable feet
- Bottom
- Heavy duty castor
- Rear door
- Beam

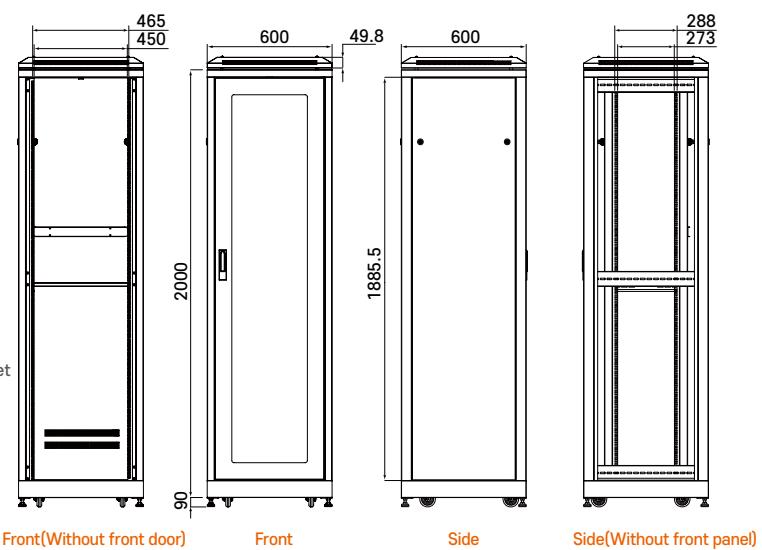

AB - 67XX SERIES

RACK AB-67XX

KEVIS RACK AB-67XX SERIES

CCTV RACK
SERIES



Product Features

- Front and rear door locks
- Cooling fans (2EA) mounted on top for internal device heat dissipation
- Front uses 5mm tempered glass
- Urethane wheels for easy movement and durability
- Left/right panel opening/closing function
- 19-inch, 22-inch monitors can be installed

Specifications

Division	6722	6737	6742
Unit	22	37	42
Height (H)	1,100	1,760	1,980
Width (W)	600	600	600
Depth (D)	750	750	750
Color	5Y7-1	5Y7-1	5Y7-1


* Please refer to the color Munsell.

* Unit quantity depends on the request of the customer. Unit Height varies according to quantity.

RACK Basic knowledge

1. RACK

: Steel box for efficient storage of servers/network equipment/monitors/DVRs, NVRs

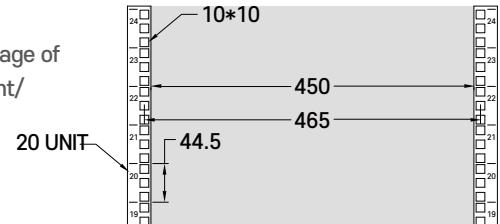

2. Standard RACK Size



- Standard RACK width (W): 19" (standard specification)
- RACK height (H): Usually 1.75 inches (4.4cm = 44.5mm) is called **1 UNIT**(1U or 1RU)
- UNIT (RU OR U): Height when installing servers and hubs. (Usually 24 or 42 fit)
- RACK specifications: Width (W) x Depth (D) x Height (H).

ex) 6U represents the height (H) of the storage device, which is $6 \times 4.4\text{cm} = 26.4\text{cm}$.

STANDARD

Distinction (Inch)	Standard			Kevis Standard		
	W	D	H	W	D	H
19"	600	900	2100	600	600	2100
23"	750	900	2100	800	900	2100

Appearance

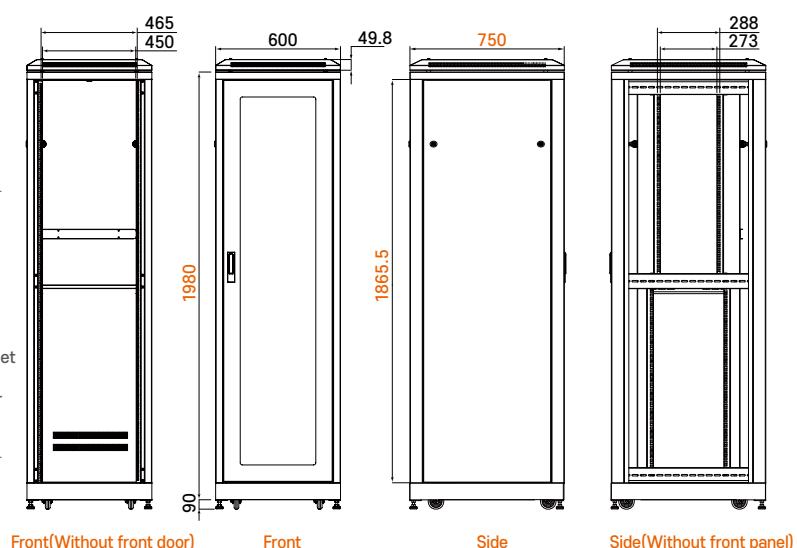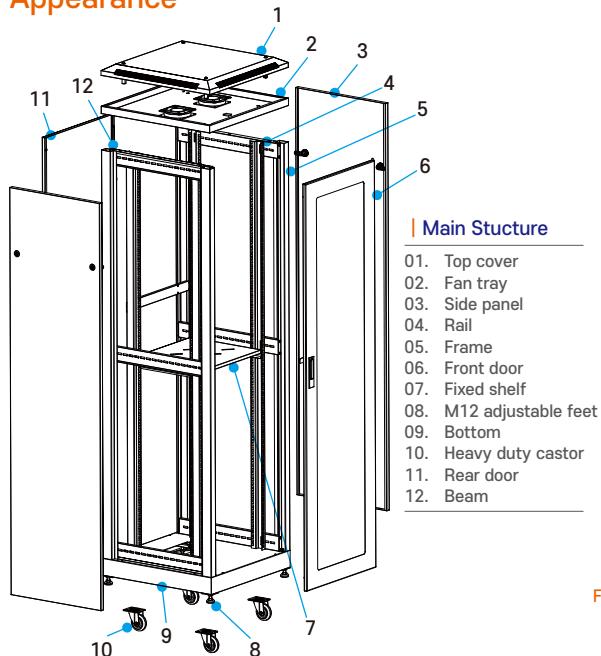

AB - 68XX SERIES

RACK AB-68XX

KEVIS RACK AB-68XX SERIES

CCTV RACK
SERIES



Product Features

- Front and rear door locks
- Cooling fans (2EA) mounted on top for internal device heat dissipation
- Front uses 5mm tempered glass
- Urethane wheels for easy movement and durability
- Left/right panel opening/closing function
- 19-inch, 22-inch monitors can be installed

Specifications

Division	6822	6827	6832	6837	6842	6847
Unit	22	27	32	37	42	47
Height (H)	1,200	1,400	1,600	1,800	2,000	2,200
Width (W)	600	600	600	600	600	600
Depth (D)	800	800	800	800	800	800
Color	5Y7-1	5Y7-1	5Y7-1	5Y7-1	5Y7-1	5Y7-1


※ Please refer to the color Munsell.

※ Unit quantity depends on the request of the customer. Unit Height varies according to quantity.

RACK Basic knowledge

1. RACK

: Steel box for efficient storage of servers/network equipment/monitors/DVRs, NVRs

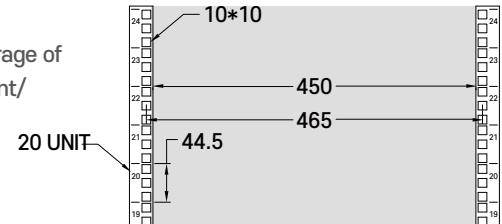

2. Standard RACK Size



- Standard RACK width (W): 19" (standard specification)
- RACK height (H): Usually 1.75 inches (4.4cm = 44.5mm) is called **1 UNIT**(1U or 1RU)
- UNIT (RU OR U): Height when installing servers and hubs. (Usually 24 or 42 fit)
- RACK specifications: Width (W) x Depth (D) x Height (H).

ex) 6U represents the height (H) of the storage device, which is $6 \times 4.4\text{cm} = 26.4\text{cm}$.

STANDARD

Distinction (Inch)	Standard			Kevis Standard		
	W	D	H	W	D	H
19"	600	900	2100	600	600	2100
23"	750	900	2100	800	900	2100

Appearance

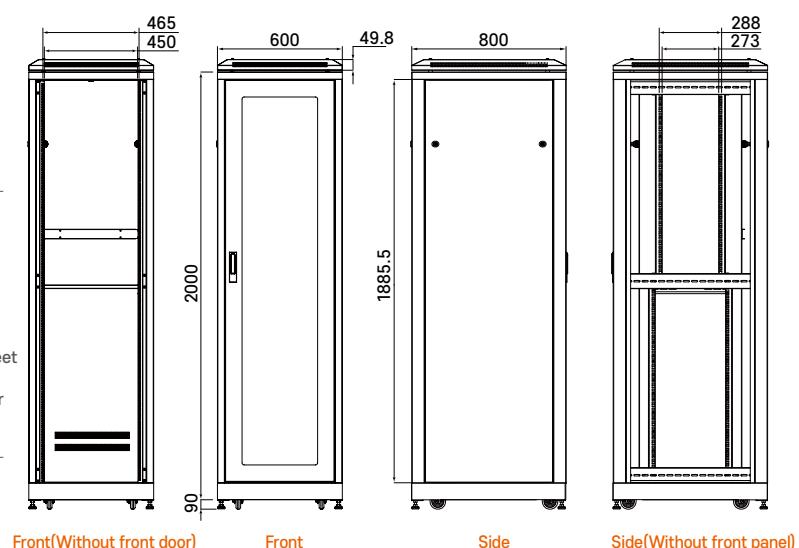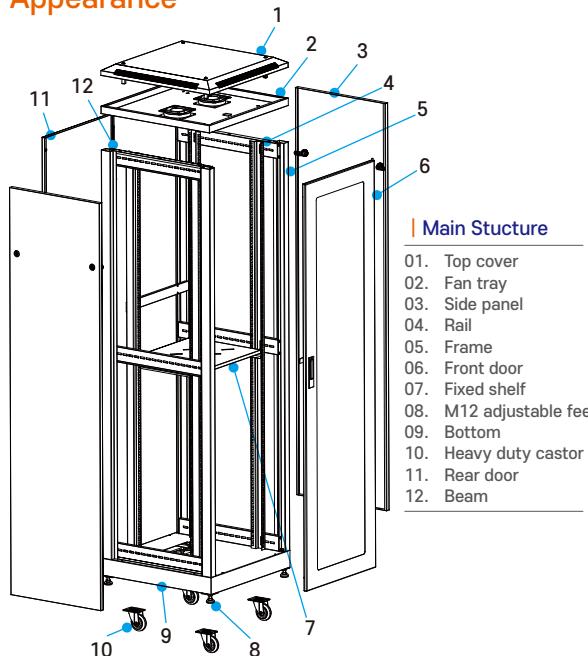

KEVIS

AB- 86XX SERIES

RACK AB-86XX

KEVIS RACK AB-86XX SERIES

CCTV RACK
SERIES



Product Features

- Front and rear door locks
- Cooling fans (4EA) mounted on top for internal device heat dissipation
- Front uses 5mm tempered glass
- Urethane wheels for easy movement and durability
- Left/right panel opening/closing function
- 19-inch, 22-inch monitors can be installed

Specifications

Division	8622	8627	8632	8637	8642	8647
Unit	22	27	32	37	42	47
Height (H)	1,200	1,400	1,600	1,800	2,000	2,200
Width (W)	800	800	800	800	800	800
Depth (D)	600	600	600	600	600	600
Color	5Y7-1	5Y7-1	5Y7-1	5Y7-1	5Y7-1	5Y7-1

※ Please refer to the color Munsell.


※ Unit quantity depends on the request of the customer. Unit Height varies according to quantity.

RACK Basic knowledge

Unit : mm

1. RACK

: Steel box for efficient storage of servers/network equipment/monitors/DVRs, NVRs

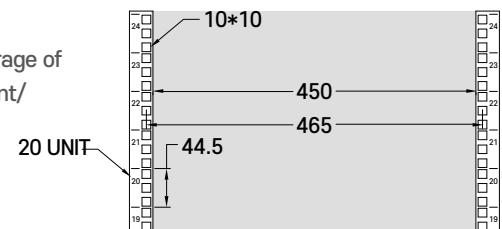

2. Standard RACK Size

- Standard RACK width (W): 19" (standard specification)
- RACK height (H): Usually 1.75 inches (4.4cm = 44.5mm) is called **1 UNIT**(1U or 1RU)
- UNIT (RU OR U): Height when installing servers and hubs. (Usually 24 or 42 fit)
- RACK specifications: Width (W) x Depth (D) x Height (H).

ex) 6U represents the height (H) of the storage device, which is $6 \times 4.4\text{cm} = 26.4\text{cm}$.


STANDARD

Unit : mm

Distinction (Inch)	Standard			Kevis Standard		
	W	D	H	W	D	H
19"	600	900	2100	600	600	2100
23"	750	900	2100	800	900	2100


Appearance

UNIT(mm)

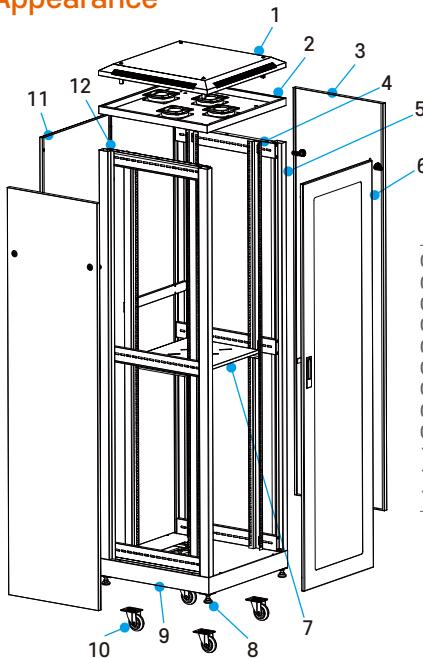

Main Structure

- Top cover
- Fan tray
- Side panel
- Rail
- Frame
- Front door
- Fixed shelf
- M12 adjustable feet
- Bottom
- Heavy duty castor
- Rear door
- Beam

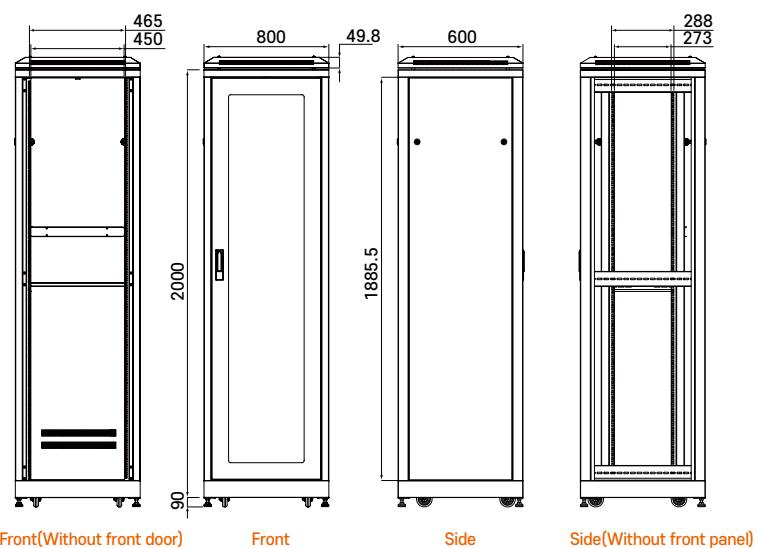

MINI RACK SERIES

MINI RACK
KEVIS MINI RACK SERIES

DVR RACK
SERIES



Product Features

- Equipped with front and rear door locks
- Front 5mm tempered glass
- Left/right panel opening/closing function

Specifications

Division	AQ-5606	AQ-5609	AQ-5612	AB-6612
Unit	6	9	12	12
Height (H)	310	445	580	600
Width (W)	540	540	540	600
Depth (D)	580	580	580	600
Color	5Y7-1	5Y7-1	5Y7-1	5Y7-1

* Please refer to the color Munsell.


* Unit quantity depends on the request of the customer. Unit Height varies according to quantity.

RACK Basic knowledge

Unit : mm

1. RACK

: Steel box for efficient storage of servers/network equipment/monitors/DVRs, NVRs

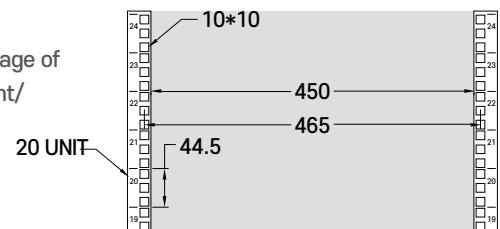

2. Standard RACK Size

- Standard RACK width (W): 19" (standard specification)
- RACK height (H): Usually 1.75 inches (4.4cm = 44.5mm) is called **1 UNIT**(1U or 1RU)
- UNIT (RU OR U): Height when installing servers and hubs. (Usually 24 or 42 fit)
- RACK specifications: Width (W) x Depth (D) x Height (H).

ex) 6U represents the height (H) of the storage device, which is $6 \times 4.4\text{cm} = 26.4\text{cm}$.

STANDARD



Unit : mm

Distinction (Inch)	Standard			Kevis Standard		
	W	D	H	W	D	H
19"	600	900	2100	600	600	2100
23"	750	900	2100	800	900	2100


Appearance

Main Structure


- Cable entry cover
- Back frame
- Frame
- Side panel
- Mounting rail
- L Fixed shelf
- Front door
- Lock

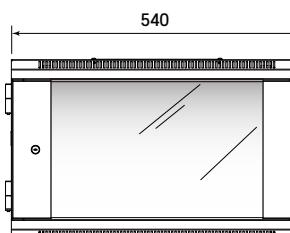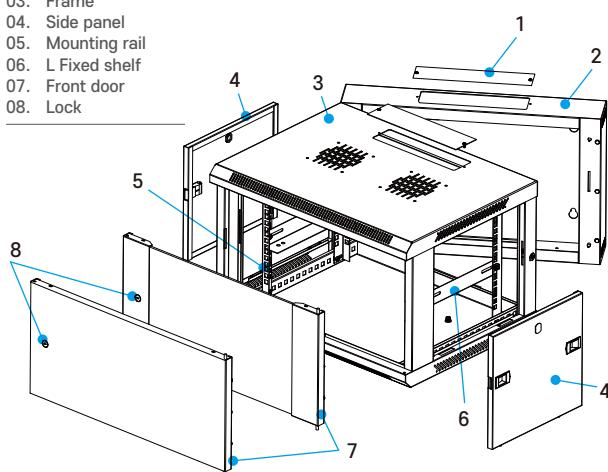


Front

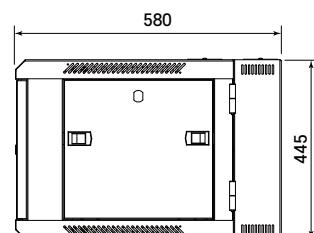

Side

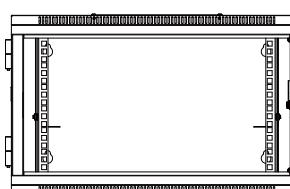

Front mounting rail (removable)

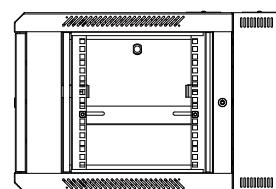

Side (Without side panel)

KEVIS