

DWH-5130



※ Specification

DWH-5130	
Dimensions(mm)	149.5(H) x 230.85(W) x 385(L) including sunshield
Housing Weight	2.8kg (6.17 lb)
Construction	Aluminum casing, all stainless steel hardware
Color	Cool Gray 1C
Window	3 mm (0.12 in) PC/ Aluminum
Locking clasps	Tamper-resistant screws provided
Camera mounting	Removable camera/lens tray, mounted with two screws
Max. camera size(mm)	80(H) x 170(W) x 110(L)
Mounting holes	2x pair of 1/4-20 tapped holes inner pair: 51 mm (2.0 in) center-to-center outer pair: 74 mm (2.9 in) center-to-center
Power Supply	12VDC / 24VAC / HPoE IEEE 802.3at*, 48 VDC nominal; or 12 VDC (switchable)
Power (housing only)	25W max.
Power (housing + camera)	50W max.
Operating Temp - external	-30 °C to +50 °C (-22 °F to +122 °F)
Operating Temp - internal	-20 °C to +50 °C (-4 °F to +122 °F)
Enclosure protection2	IP67, IK09, NEMA-4X
NEMA TS 2-2003 (R2008), para 2.1.5.1 using fig. 2.1 test profile	-34 °C to +74 °C (-30 °F to +165 °F)

Features

- Wide Window for Multi Lens Camera Application
- Various Camera Combination or Connection
 - ☞ Thermal camera
 - ☞ Visual Bi-spectrum
- Indoor / Outdoor
- Waterproof IP66


- All models Include Heater, Blower and Sunshield.
And variety options for unique functions such as Window wiper, PoE, IR lamp etc.

- DWH5130S - (Sunshield)
- DWH5130SH - (Sunshield, Heater)
- DWH5130SHB - (Sunshield, Heater & Blower)
- DWH5130SHBP - (Sunshield, Heater & Blower, PoE)

SIDE OPEN VIEW




Dimensions

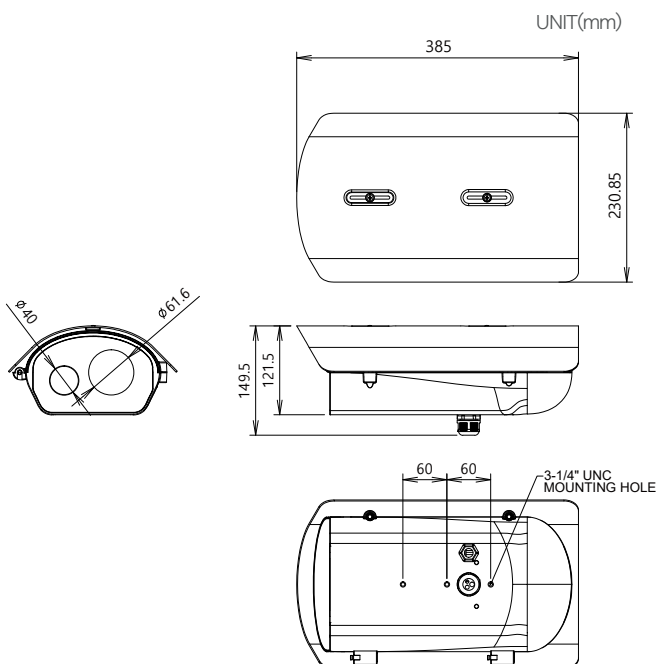


Accessories

| KBR-080CC | Wall Mount



| KBR-1000 | Wall Mount



Specifications

Material	Aluminum
Weight	1.2kg
Max Loading	15kg
Color	Cool gray 2C
Pan&Tilt	360° / 90°
Install Dim	233.5x172x73

※ Compatible with PTB-100

Specifications

Material	Aluminum
Weight	1kg
Max Loading	15kg
Payload	Cool gray 1C
Dimension	360° / 90°
Install Dim	352 x 184.5 x 89

※ Compatible with KBR-2000 ~ KBR-5000